


**i** Meets AS 4267

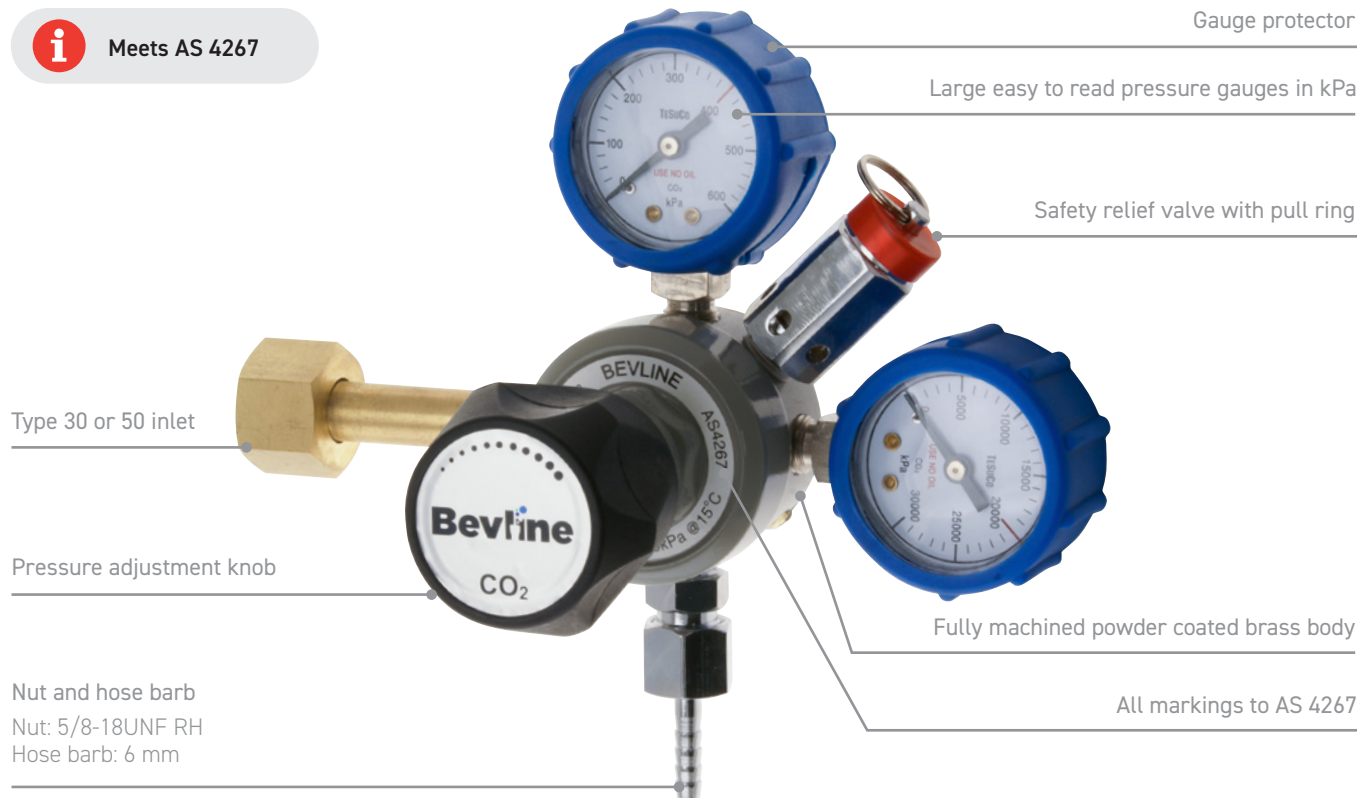

## BEVERAGE REGULATOR

For Use On Single Cylinder CO<sub>2</sub> & N<sub>2</sub> Systems

This compact regulator is specifically designed for small beer dispensing systems using CO<sub>2</sub> and CO<sub>2</sub> / N<sub>2</sub> mixtures. A safety relief valve is fitted to the downstream low pressure side, has high and low pressure gauges with gauge protectors and in addition is fitted with a check valve on the outlet, complete with a 6 mm hose barb and nut.

### FEATURES

- Large easy to read pressure gauges in kPa
- Gauge protector
- Safety relief valve with pull ring
- Type 30 or 50 inlet
- Pressure adjustment knob
- Fully machined powder coated brass body
- All markings to AS 4267
- Nut and hose barb - Nut: 5/8-18UNF RH, hose barb: 6 mm

### SPECIFICATIONS

<b>Materials of Construction</b>	
Body	Machined powder coated brass
Pressure gauges	Powder coated steel
Gauge protectors	Neoprene rubber
Diaphragm	EDPM
Seat	PU
<b>Performance</b>	
Max. working pressure	20,000 kPa
Outlet pressure	0-400 kPa
Operating temperature	-20°C to +50°C
<b>Weight</b>	1.35 kg
<b>Dimensions (mm)</b>	(W) 200 (H) 175 (D) 117
<b>Markings</b>	Bevline™ Gas service Maximum working pressure Outlet pressure AS 4267 Date of manufacture Ports marked HP/LP
<b>Warranty</b>	5 Years (Manufacturer's defect)
<b>Country of Origin</b>	China

PART NO	DESCRIPTION
RC1SCD04R	CO <sub>2</sub> Regulator 400 kPa
RC1SNI04R	N <sub>2</sub> Regulator 400 kPa