


OXYGEN/ACETYLENE



| PART NO | TIP SIZE | PRESSURE (kPa) | | TYPICAL CONSUMPTION (L/min) | | HEAT OUTPUT (MJ/h) |
|---------|----------|----------------|-----------|-----------------------------|----------|--------------------|
| | | OXYGEN | ACETYLENE | OXYGEN | FUEL GAS | |
| GWHT812 | 8 x 12 | 150 | 100 | 45-58 | 41-55 | 180 |
| GWHTA1 | 8 x 12 | 150 | 100 | 45-58 | 41-55 | 180 |
| GWHTA2 | 12 x 12 | 200 | 100 | 74 | 65 | 215 |

i Typical consumption rates have been listed. These may vary depending on settings by the operator and environmental conditions.

OXYGEN/LPG

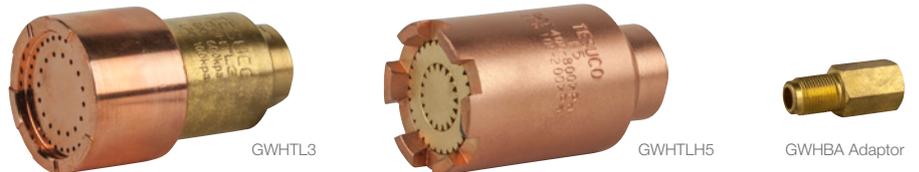

| PART NO | TIP SIZE | PRESSURE (kPa) | | TYPICAL CONSUMPTION (L/min) | | HEAT OUTPUT (MJ/h) |
|---------|--|----------------|---------|-----------------------------|----------|--------------------|
| | | OXYGEN | LPG | OXYGEN | FUEL GAS | |
| GWHTL1 | 18 x 12 | 500 | 100 | 200 | 50 | 280 |
| GWHTL2 | 36 x 12 | 600 | 100 | 300 | 75 | 420 |
| GWHTL3 | 48 x 12 | 600 | 100 | 400 | 100 | 560 |
| GWHTL4 | 48 x 15 | 1000 | 300 | 600 | 150 | 840 |
| GWHTLH1 | H1 | 100-200 | 50 | 67-117 | 17-33 | 186 |
| GWHTLH2 | H2 | 200-300 | 50 | 98-213 | 25-53 | 298 |
| GWHTLH3 | H3 | 200-500 | 100 | 142-382 | 37-95 | 532 |
| GWHTLH4 | H4 | 300-600 | 100 | 233-473 | 60-118 | 663 |
| GWHTLH5 | H5 | 400-800 | 100-200 | 283-662 | 72-167 | 934 |
| GWHBA | Adaptor – must be used in GWHTLH1 to 5 | | | | | |

i Typical consumption rates have been listed. These may vary depending on settings by the operator and environmental conditions.