



Tesuco® offers Flame Pro™ OxyTurbo® Set 200 for various professional brazing applications such as, plumbing, refrigeration and air conditioning.

The sets are safe and easy to transport, compact and lightweight (27 cm high and about 6 kg in weight when disposable Oxygen and Flame Pro™ cylinders are fitted).

The Turboset weight without cylinders is 4.3 kg

FEATURES

- Flame temperature over 3000°C.
- Fuel gas regulator with delivery pressure gauge (CGA600 Inlet connection suitable for MAPP type gases).
- Flashback arrestors built into hand piece and regulators.
- Hand piece patented design with adjustment valves.
- Hand piece holder.
- Cylinder bracket retention system.
- Oxygen regulator with cylinder contents gauge.
- 2 m Oxygen/fuel gas twin hose set.
- Unique two piece nozzle design for a stable flame in all conditions.
- Metal carry case patented lightweight design and comfortable carry handle.
- Complies to international standard EN 1326.
- Independently approved by Apragaz to EN 1326.
- Made in Italy.



Cylinder Bracket Retention System



Hand Piece Holder



Unique Two Piece Nozzle Design



Inbuilt Flashback Arrestor, Torch End

- Flame Arrester
- Non-return Valve




Inbuilt Flashback Arrestor, Regulator End

- Flame Arrester **FA**
- Non-return Valve **NV**

INCLUSIONS

QTY

INCLUSIONS	QTY
Metal carry case	1
Oxygen regulator with inbuilt arrestors	1
Fuel Gas regulator with inbuilt arrestors	1
2 m Twin hose set fitted to the handpiece	1
Hand piece with inbuilt arrestors	1
Lance fitted with 160 L size nozzle	1
Star holder with 4 sized nozzles (63, 100, 250 & 315 L)	1
Protective goggles	1
Multipurpose spanner	2
Flint lighter	1
Filler metal with deoxidiser	1
Spare oxygen regulator 'O'-rings	3
Instruction manual	1

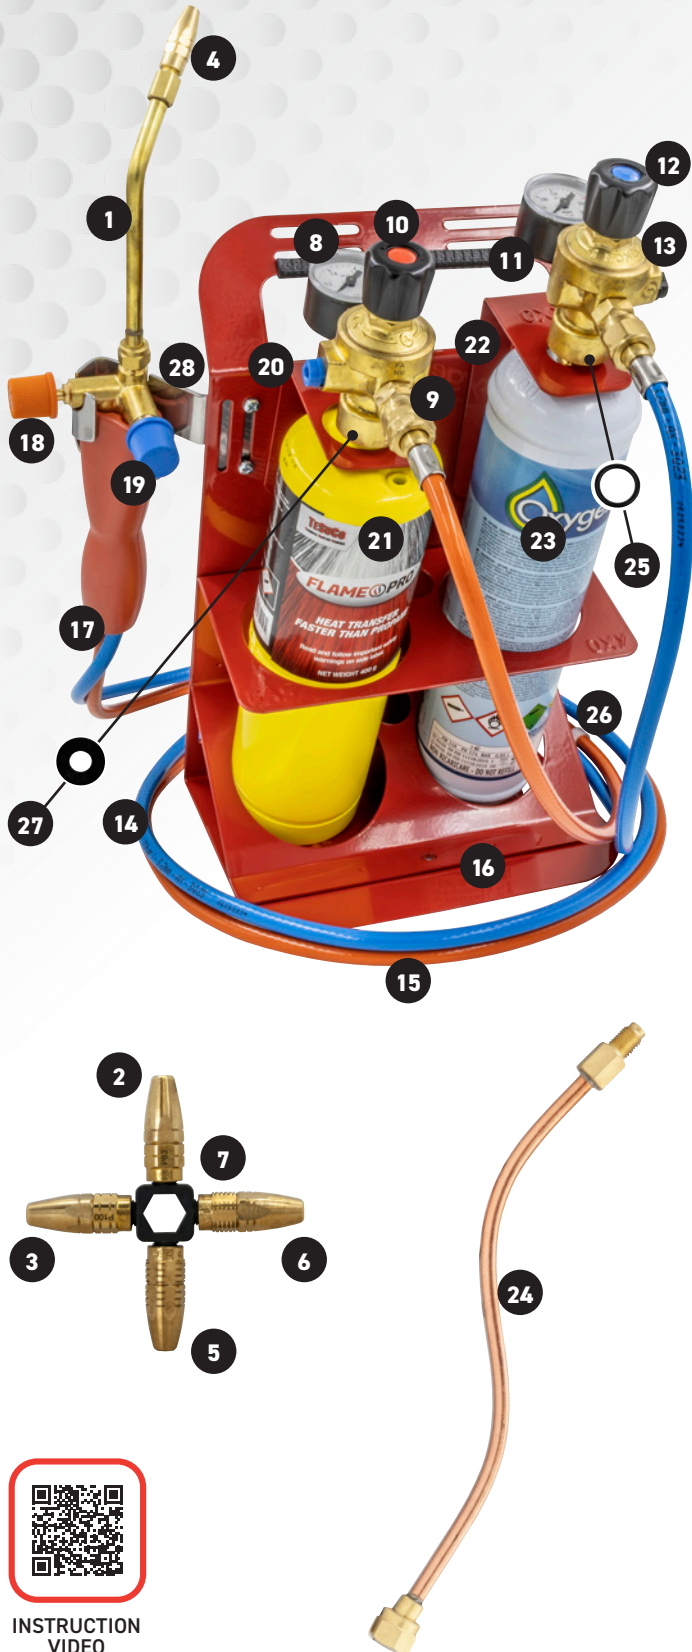

INDICATIVE GAS CONSUMPTION RATES

NOZZLE SIZE	OXYGEN	FUEL GAS
63 L	150 g/h (45 min)	40 g/h (5.5 h)
100 L	180 g/h (35 min)	84 g/h (4.0 h)
160 L	250 g/h (25 min)	117 g/h (2.5 h)
250 L	400 g/h (20 min)	150 g/h (2.0 h)
315 L	550 g/h (15 min)	230 g/h (1.5 h)

PART NO.	DESCRIPTION
1	OTS200LS Lance set
2	OTS200N063 63 L Nozzle
3	OTS200N100 100 L Nozzle
4	OTS200N160 160 L Nozzle
5	OTS200N250 250 L Nozzle
6	OTS200N315 315 L Nozzle
7	OTS200ST Star tip set
8	OTS200RMG Pressure gauge for MAPP gas regulator
9	OTS200RM Fuel gas regulator
10	OTS200RGK Regulator control knob fuel gas
11	OTS200ROG Pressure gauge for oxygen regulator
12	OTS200ROK Regulator control knob oxygen
13	OTS200RO Oxygen regulator
14	OTS2000HK 2 m Oxygen hose set
15	OTS200GHK 2 m Fuel gas hose set
16	OTS200RMS Red metal storage unit
17	OTS200HA Hand piece assembly with 2 m hose set
18	OTS200HGK Handle control knob fuel gas
19	OTS200HOK Handle control knob oxygen
20	OTS200GRB Red bracket fuel gas
21	GTFP 400 g Flame Pro™ cylinder
22	OTS200ORB Red bracket oxygen
23	00B 1 LTR Oxygen cylinder
24	OTS200BL Bendable lance (sold separately)
25	OTSORO 'O'-ring for oxygen regulator
26	OTS200HH Hose clip (2 per hose set)
27	OTSORM 'O'-ring for fuel gas regulator
28	OTS200HPH Metal bracket for hand piece
	OTS200IM Instruction manual for Turbo Set 200



INSTRUCTION VIDEO