


GK REGULATORS

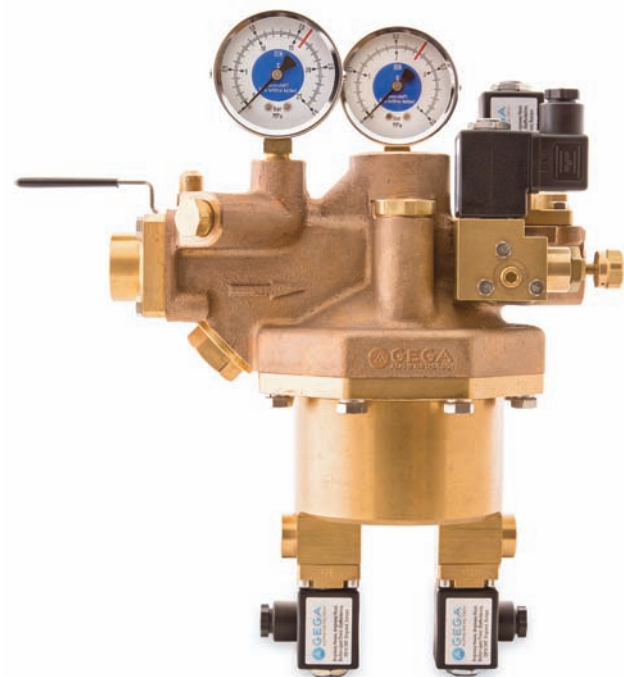

MAIN CHARACTERISTICS

Operating media Heating gas, oxygen	
Application	Regulation of prepressure for required system pressure
Main parts	Solid die casting housing. inlet-ballvalve. dirt trap. lockable pressure gauges. adjusting toggle for pressure adjusting
Optional	Main Solenoid valve. Bypass valve for the integrated pilot flame (with Solenoid valve if required)
Pressure	Maximal inlet pressure 40 bar Maximal outlet pressure 37.7 bar Operating pressure 0.5 to 18 bar
Weight	10 to 12 kg depending on version
Product variations	
All GK series contain two versions:	
<ul style="list-style-type: none"> - Single outlet - Double outlet (for using 2 torches) 	
Type S	Bypass with Solenoid valve (w/o Manometerconnector)
Type CG	Bypass with manometerconnector (w/o solenoid valve)
Type SG	Bypass with solenoid valve and manometerconnector
Item no.:	Available on request